




SK Coolant Collet

SK Collet available for cutting tools with oil holes
New SK Coolant Collet

ϕD $\phi 3.0$ ~ $\phi 25.0$

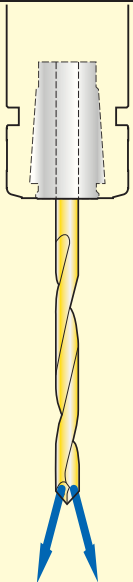

Sales Point



Quick & Easy to block coolant diffusion

- ✓ Can be used for existing Slim Chucks and Major Dream Holders
- ✓ Optimized for the cutting tools with oil holes
- ✓ High pressure coolant is compliant up to 7Mpa.

New SK Coolant Collet



SK-AC

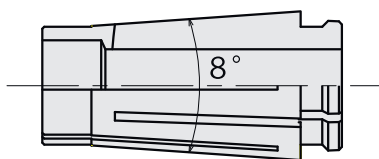

Style	Code No.	D
SK 6	SK 6- 3AC	3.0
	- 4AC	4.0
	- 5AC	5.0
	- 6AC	6.0
SK10	SK10- 3AC	3.0
	- 4AC	4.0
	- 5AC	5.0
	- 6AC	6.0
	- 7AC	7.0
	- 8AC	8.0
	- 9AC	9.0
	-10AC	10.0
SK13	SK13- 4AC	4.0
	- 5AC	5.0
	- 6AC	6.0
	- 7AC	7.0
	- 8AC	8.0
	- 9AC	9.0
	-10AC	10.0
	-11AC	11.0
SK16	SK16- 6AC	6.0
	- 7AC	7.0
	- 8AC	8.0
	- 9AC	9.0
	-10AC	10.0
	-11AC	11.0
	-12AC	12.0
	-13AC	13.0
	-14AC	14.0
SK20	SK20-12AC	12.0
	-16AC	16.0
	-20AC	20.0
	-25AC	25.0
SK25	SK25-16AC	16.0
	-20AC	20.0
	-25AC	25.0

Quick & Easy to block coolant diffusion


Slim Chuck / Major Dream Holder



SK Nut, SKT/MDSK Nut



New SK Coolant Collet

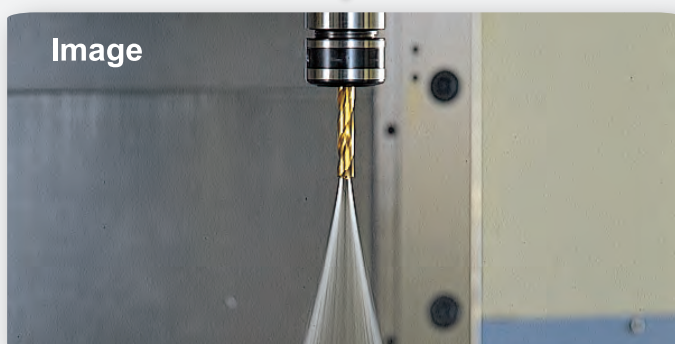

J-Nut & J Cap with standard SK Collet is also available as alternative option.

J-Cap with Jet Coolant Groove



J-Nut



* Chucking range: h8