


NIKKEN SHIN HYDRAULIC CHUCK


新時代のフィニッシングホルダ、日研シン・ハイドロチャック誕生



ハイドロチャックならではの簡便さにより段取り時間を大幅に短縮 熟練作業者でなくとも、高精度リーマ加工が可能になります。









B T二面拘束主軸マシニングセンタでご使用頂ける NBT シリーズ 及び HSK シリーズをラインナップ

NBT30		NBT40		NBT	NBT50		HSK63A		HSK100A	
把握径	L寸法	把握径	L寸法	把握径	L寸法	把握征	圣 L寸法	把握径	L寸法	
φ 12	90	φ12	90	φ 16	105	φ12	90	φ 16	135	
	120		120		135		120		165	
φ 16	90	φ16	90	φ20	105	φ16	90	φ 20	135	
	120		120		135		120		165	
		φ20	90	φ25	120	φ 20	90	φ25	135	
			120		150		120		165	
				φ32	120			φ32	135	
					150				165	

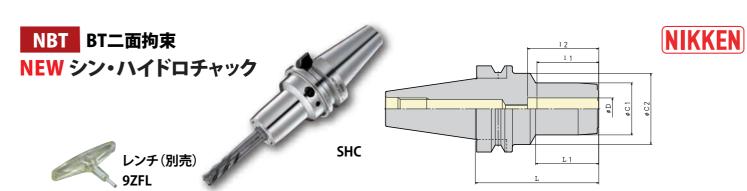

TAPER	Code No.	D	L	L1	l1	l2	C1	C2
NBT30	NBT30 -SHC12 - 90	12	90	45	45	52	32	52
	-120	12	120	45	45	52	32	52
	-SHC16 - 90	16	90	46	45	52	38	52
	-120	16	120	46	45	52	38	52
NBT40	NBT40 -SHC12 - 90	12	90	45	45	52	32	52
	-120	12	120	45	45	52	32	52
	-SHC16 - 90	16	90	46	45	52	38	52
	-120	16	120	46	45	52	38	52
	-SHC20 - 90	20	90	41	42	52	42	53
	-120	20	120	41	42	52	42	53
NBT50	NBT50 -SHC16 - 105	16	105	46	45	52	38	52
	- 135	16	135	46	45	52	38	52
	-SHC20 -105	20	105	41	42	52	42	53
	- 135	20	135	41	42	52	42	53
	-SHC25 -120	25	120	41	42	55	47	58
	- 150	25	150	41	42	55	47	58
	-SHC32 -120	32	120	41	42	55	54	65
	- 150	32	150	41	42	55	54	65





TAPER	Code No.	D	L	L1	l1	12	C1	C2
HSK63A	HSK 63A -SHC12 - 90	12	90	45	45	52	32	52
	-120	12	120	45	45	52	32	52
	-SHC16 - 90	16	90	45	45	52	38	52
	-120	16	120	45	45	52	38	52
	-SHC20 - 90	20	90	41	42	52	38	52.4
	-120	20	120	41	42	52	38	52.4
HSK100A	HSK100A -SHC16 -135	16	135	46	45	52	38	52
	- 165	16	165	46	45	52	38	52
	-SHC20 -135	20	135	41	42	55	42	53
	- 165	20	165	41	42	55	42	53
	-SHC25 - 135	25	135	41	42	55	47	58
	- 165	25	165	41	42	55	47	58
	-SHC32 -135	32	135	41	42	55	54	65
	- 165	32	165	41	42	55	54	65