



Q




Fig.1




Fig.2




Fig.3

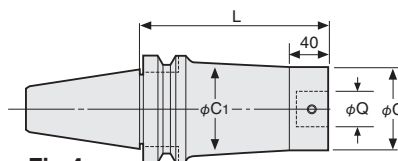


Fig.4

テーパ	Code No.	ドッキング径Q	L	C	C1	H	H1	接続ボルト No.	Fig.	重量(kg)	
No.30	BT30-Q 9- 50	9	50	19	30	20	-	B19	2	0.5	
	-Q12- 65	12	65	24	-	40		B12	1	0.5	
	-Q16- 50	16	50	31	-	25		B16		0.5	
	-Q20- 50	20	50	40	-	26		B20		0.5	
	-Q26- 40	26	40	50	45	18		6	B26N	3	0.5
No.40	BT40-Q 9- 80	9	80	19	30	5	-	B19	2	1.2	
	- 95N	9	95	-	-	27		B19		1.2	
	-Q12- 80	12	80	24	35	12		B12		1.2	
	- 110	12	110	-	-	50		B12		1.3	
	-Q16- 95	16	95	31	42	22		B16		1.5	
	- 125	16	125	-	-	55		B16	1.6		
	-Q20- 80	20	80	40	50	27		B20	1.5		
	- 110	20	110	-	-	60		B20	1.7		
	-Q26- 50	26	50	50	-	20		B26N	1	1.1	
	- 95	26	95	-	-	65		B26N	1	1.8	
	- 140	26	140	-	-	110		B26N	1	2.4	
	-Q34- 95	34	95	64	62	68		55	B34	3	2.2
	- 110	34	110	-	-	83		70	B34		2.6
	-Q42- 95	42	95	83	83	68		55	B42		2.8
	No.50	BT50-Q 9-110	9	110	19	40		5	-	B19	2
- 125N		9	125	-	-	27	B19	4.1			
-Q12- 95		12	95	24	44	12	B12	4.0			
- 125		12	125	-	-	50	B12	4.0			
-Q16- 125N		16	125	31	50	22	B16	4.5			
- 155		16	155	-	-	55	B16	4.6			
-Q20- 110		20	110	40	60	27	B20	4.6			
- 125		20	125	-	-	60	B20	4.5			
-Q26- 65		26	65	50	65	27	B26N	1		3.7	
- 140		26	140	-	-	47	B26N	2		5.3	
- 170N		26	170	-	-	112	B26N	2		5.4	
-Q34- 140		34	140	64	80	102	B34	1		5.6	
- 170		34	170	-	-	120	B34	2		6.5	
- 200		34	200	-	-	150	B34	2		7.1	
-Q42- 125		42	125	83	-	87	B42	1		6.5	
- 190		42	190	-	-	152	B42	1		9.1	
-Q42- 225A		42	225	83	98	-	-	B42		4	12.9
- 275A		42	275	-	-	-	-	B42			15.6
- 325A	42	325	-	-	-	-	B42	18.3			
- 375A	42	375	-	-	-	-	B42	21.0			

- ★全シリーズセンタスルー仕様です。
- ★接続ボルト及びレンチは付属しています。
- ★標準よりL寸法が長い場合、有効ボーリング長MとQ No.をご指定下さい。
- ★高圧クーラントを使用する場合、クーラント圧により寸法変化が生じる事がありますので、高圧クーラント対応のクーラントパイプもご検討下さい。

