


Support Tables line-up

Table Model	Center Height	Without Clamping	With Clamping		With Clamping Slim design
			Pneumatic (0.5MPa)	Hydraulic (3.5MPa)	
RED200	135	CST100-135	TAT-170N	—	TAS-100N
RED300	170		TAT-200N*/250N		—
RED400	230		—	TAT-321N/401N	TAT-403N

*

CST100-135



Without Clamping

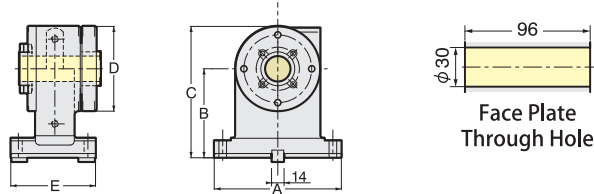

Code No.	A	B	C	D	E	Weight (kg)
CST100-135	150	135	185	100	100	8

TAT-170N


Pneumatic : 0.5MPa
Clamping Torque : 205N·m

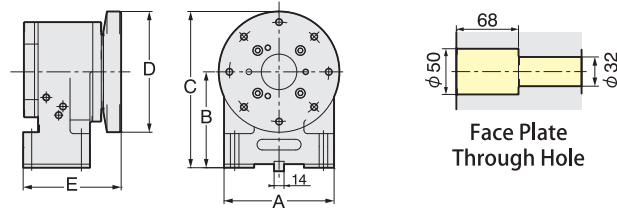

Code No.	A	B	C	D	E	Weight (kg)
TAT-170N	155	135	220	170	138	25

TAT-200N, 250N


Pneumatic : 0.5MPa, Hydraulic : 3.5MPa
Clamping Torque Pneumatic : 112N·m
Hydraulic : 784N·m

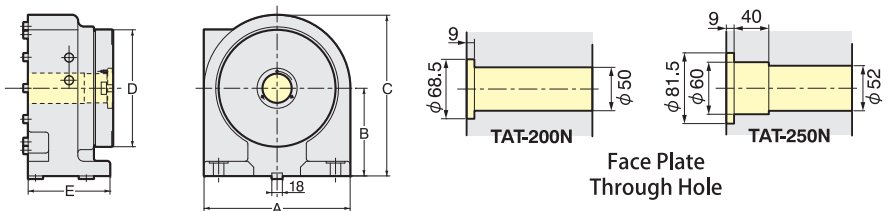

Code No.	A	B	C	D	E	Weight (kg)
TAT-200N	250	150	275	200	145	43
TAT-250N	250	170	295	250	145	50

TAT-321N, 401N

Hydraulic : 3.5MPa
Clamping Torque : 1470N·m

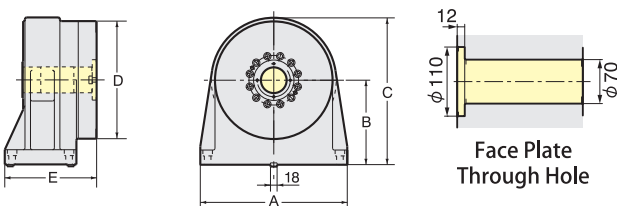

Code No.	A	B	C	D	E	Weight (kg)
TAT-321N	400	230	400	320	250	120
TAT-401N	400	230	430	400	250	140